

Roller conveyors, sliding, lift and work tables (Supplement)



RV 27.1



STH 2500

Product data sheet
Roller conveyors, sliding, lift and work tables (Supplement)
04/22 PR70102

Technical information

	1*	2*	3*
	STH 2500	ST 2400	ST 3000
1*	 B = 2500 mm T = 1600 mm H = 850 mm	B = 2400 mm T = 1600 mm H = 850 mm	B = 3000 mm T = 1600 mm H = 850 mm
2*	 B = 2500 mm T = 1450 mm H = 1750 mm	B = 2400 mm T = 1450 mm H = 850 mm	B = 3000 mm T = 1450 mm H = 1750 mm
3*	 B = 2500 mm T = 1450 mm H = 2250 mm		
	310 kgs	170 kgs	215 kgs
	89,8 Litres	49 Litres	49 Litres
	7 bar	7 bar	7 bar
STH extendable to 3500 mm			

	BT 1605	BT 2005	BT 2505	BT 1605	BT 2005	BT 2505
	126 kgs	140 kgs	155 kgs		7-10 bar	
	L = 1600 mm B = 1300 mm H = 850 - 950 mm	L = 2000 mm B = 1300 mm H = 850 - 950 mm	L = 2500 mm B = 1300 mm H = 850 - 950 mm		4 Litres	

Technical data are valid for basic machine without options. Size according to layout.

Urban GmbH & Co. Maschinenbau KG

Dornierstraße 5
DE - 87700 Memmingen
Tel.: +49 (0) 8331 858 - 0
E-Mail: urban@u-r-b-a-n.com
www.u-r-b-a-n.com

Roller conveyors, sliding, lift and work tables

(Supplement)

Roller conveyors vertical RV

facilitates transportation of windows elements.

- available in 260 mm and 500 mm roll width at bottom and 200 mm (100 mm) pitch
- available in lengths of 1 m and 2 m
- individual grouping assembly possible prefabricated machine parts systems
- durable due to strong loadable castor types

Supplement variant

- roller conveyor can be moved aside
- moving unit FH 10.2



RV 27.1



Drive unit with brake FH 10.2



RVS/W RVT door frame



RV 27.5 Option 5-fold divided



RV.ES 50/26 End stop


Work tables BT 1605, BT 2005, BT 2505

for the assembly of metal fittings and corner fittings.

- pneumatic adjustment of the table inclination up to 15°
- counter hold by two individually adjustable casters
- profile protection by guide rails or felt surface (please indicate when ordering, brushes available at extra price)
- table height adjustable from 855 mm to 950 mm, therefore integrable into production lines

Option

- mobile transport units FH 10.2 and FHS

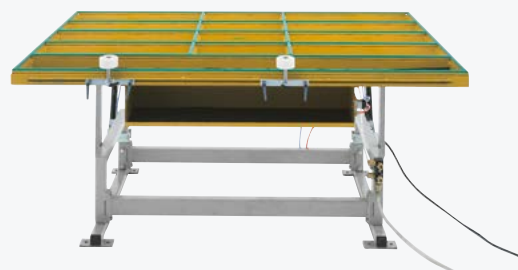

Tilting tables ST 2400, ST 3000

move windows from horizontal into vertical position and are therefore flexible allround work places.

- stepless, pneumatic adjustable tilting area from 100° to 180°
- easy removable roller conveyor
- profile protecting with glass ledges or felt surface (please indicate when ordering, brush available at extra charge)
- table height from 850 mm to 950 mm adjustable, therefore integrable into production line



ST 2400



Height adjustable tilting table STH 2500

move windows elements into correct machining position From horizontal into vertical and from bottom to top bottom.

- stepless tilting table area from 100° to 180°
- stepless height adjustable up to 500 mm
- left and right extendable additional support up to 500 mm
- 2 flat clamping cylinder units (SP 120)
- easy removable roller conveyor
- profile protecting with glass ledges or felt surface (please indicate when ordering, brush available at extra charge)
- table height from 850 mm to 950 mm adjustable, therefore integrable into production line

Supplement variant

- STH 2500/W same as STH 2500 only with weather bars notch (72 mm deep, 140 mm high)
- additional flat clamping cylinder unit SP 120, SP 200
- moving unit FH 10.2



STH 2500