


Copy router for pvc doors and windows profiles

With a manual vertical milling unit and a horizontal drilling unit with manual feed.
Conceived to carry out the milling with the vertical unit and the triple drilling with the horizontal unit on steel reinforced pvc profiles for the inserting of a window handle with just one clamping without turning the profile.
A wide range of working operations can be carried out with the vertical milling unit (see working examples on the reverse).




Code 104231E+502339

CE

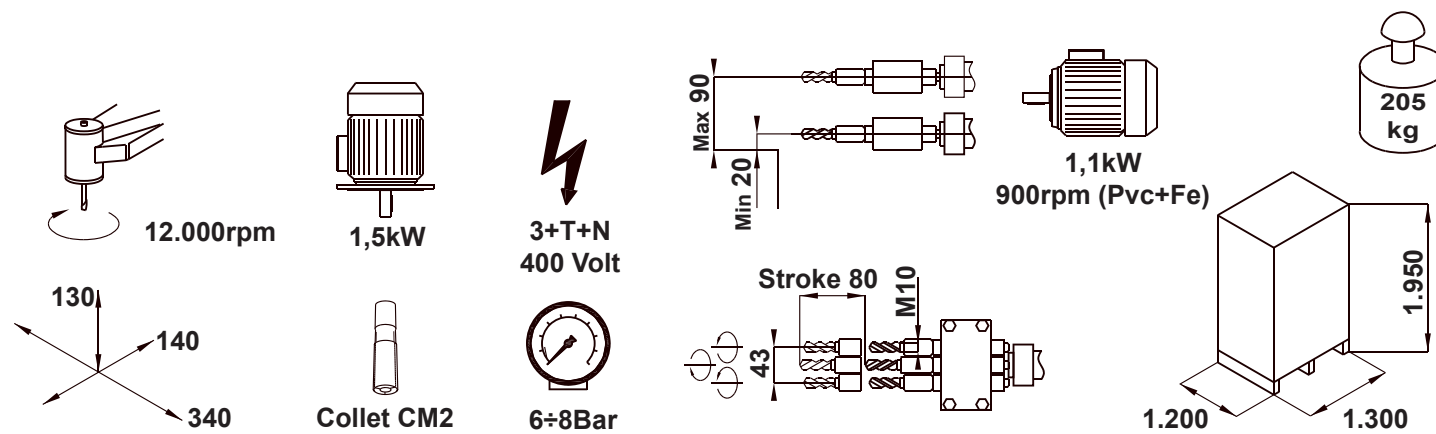

The Company reserves the right to amend and improve its products without notice.

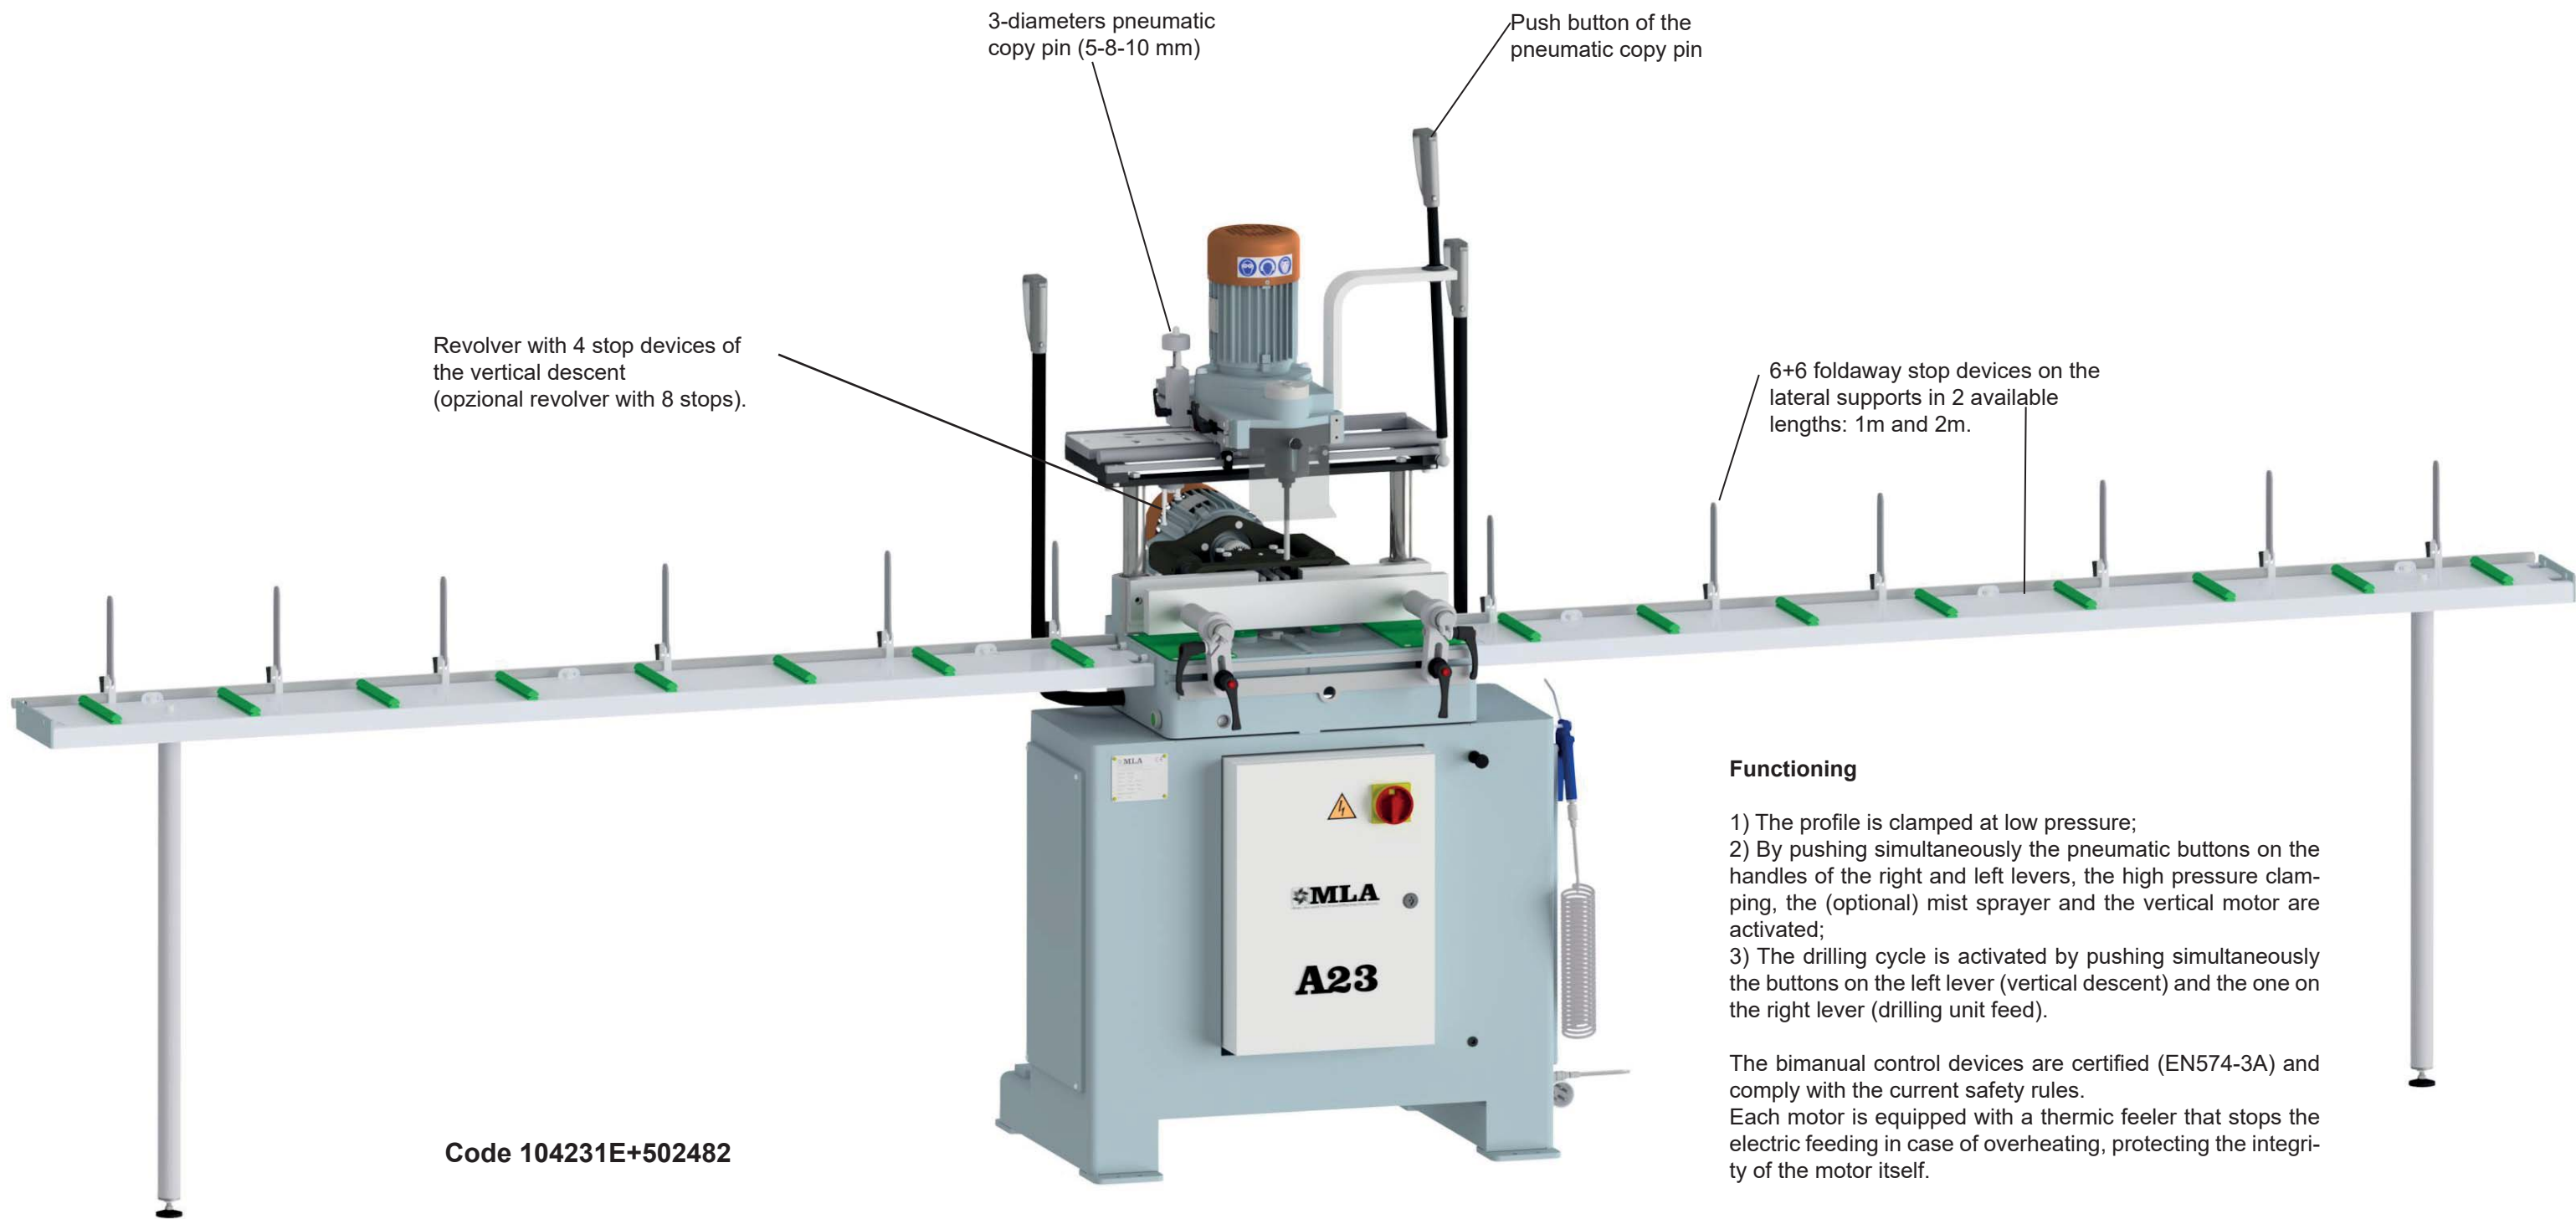

Revolver with 4 stop devices of the vertical descent (optional revolver with 8 stops).

3-diameters pneumatic copy pin (5-8-10 mm)

Push button of the pneumatic copy pin

6+6 foldaway stop devices on the lateral supports in 2 available lengths: 1m and 2m.

Code 104231E+502482

Functioning

- 1) The profile is clamped at low pressure;
- 2) By pushing simultaneously the pneumatic buttons on the handles of the right and left levers, the high pressure clamping, the (optional) mist sprayer and the vertical motor are activated;
- 3) The drilling cycle is activated by pushing simultaneously the buttons on the left lever (vertical descent) and the one on the right lever (drilling unit feed).

The bimanual control devices are certified (EN574-3A) and comply with the current safety rules. Each motor is equipped with a thermic feeler that stops the electric feeding in case of overheating, protecting the integrity of the motor itself.