

AKFU-250 TWL / AKFU-330

TWL End milling machine



AKFU-250 TWL



AKFU-330

Product data sheet
AKFU-250 TWL / AKFU-330
07/22 PR10411

Our know-how - your advantage

AKFU-250 TWL


Special end milling machine for the milling of the profile core at +/- 45° for SINGLE or DOUBLE wooden look with a PLC-controlled clockwise or counter-clockwise rotation.

The newly developed profile stop and clamping system allows for rational and reliable processes. The profile stop system is steplessly adjustable via handwheel with counter.

The hydropneumatic feed moves the powerful engine with brake and guarantees a clean milling result. A cutter quick change system with counter holder and pneumatic clamping as well as the automatic process are further highlights. .

Options

- exhaust units
- quick change sleeve Ø 32 mm

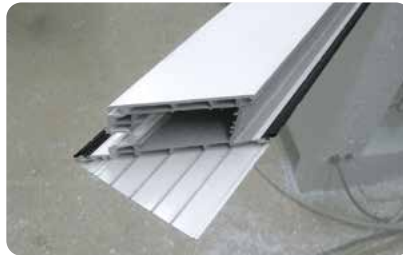

AKFU-330

End milling machine for SINGLE or DOUBLE wooden look for the milling of the profile contour at 90°.

The special profile stop and clamping system allows for rational and reliable processes.

Stepless adjustment of the profile stop system via handwheel with counter.

The hydropneumatic feed with speed control, brake motor with counter holder, a pneumatic clamping and a cutter quick change system.

Optionen

- double rod milling
- exhaust unit
- quick change sleeve Ø 32 mm



Technical information



390 kgs




6 - 8 bar




2.870 u/min




230 - 400 V
3 kW




L = 1175 mm
B = 810 mm
H = 1300 mm




Profil width
90° = 125 mm
Milling depth
AKFU 250 TWL: 95 mm
AKFU 330: 125 mm



AKFU 250 TWL
Ø max. 250 mm
W Ø = 32 mm
h max = 130 mm



AKFU 330
Ø max. 330 mm
W Ø = 32 mm
h max = 130 mm



AKFU 250 TWL: 500 mm
AKFU 330: 500 mm

Technical data are valid for basic machine without options. Size according to layout.

Urban GmbH & Co. Maschinenbau KG

Dornierstraße 5
DE - 87700 Memmingen
Tel.: +49 (0) 8331 858 - 0
E-Mail: urban@u-r-b-a-n.com
www.u-r-b-a-n.com

Subject to errors and modifications